

TOTO®

CST424EF(G) EcoPromenade 1.28 GPF High Efficiency Toilet, Elongated



- Traditional design with stately lines
- Powerful and quiet flush
- Promenade design suite: Matching pedestal and self-rimming lavatories
- Large water surface
- Universal Height

High profile, elongated, close coupled toilet. Low consumption (1.28 Gpf/4.8 Lpf) gravity flushing action.

Tank cover, fittings, chrome plated trip lever less seat.

■ CST424EF

Elongated, 12" rough-in, less seat.

■ CST424EFG

Elongated, 12" rough-in, less seat. SanaGloss glazing.

□ C424EF

Elongated front bowl only, 12" rough-in.

□ C424EFG

Elongated front bowl only, 12" rough-in. SanaGloss glazing.

□ ST423E

Promenade tank and cover only. Complete with tank trim and coupling components.

□ SS114

SoftClose: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

 ADA Compliant

Colors:

Standard #01 Cotton

Optional See price book for additional colors

Trip Lever:

Standard #CP Chrome Plated

Optional See price book for additional finishes

CST424EF - EcoPromenade Toilet
SS114 - SoftClose Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet.



Standard 2" flush valve Wide 3" flush valve

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



CST424EF(G)

EcoPromenade 1.28 GPF High Efficiency Toilet, Elongated

■ PERFORMANCE

The TOTO® E-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway. Promenade toilets are designed to match the Promenade Lavatory Suite.

■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf
 Flush System: Gravity Feed
 Min. Water Pressure: 8 psi
 Water Surface: 8-7/8" x 6-3/8"
 Trap Diameter: 2-1/8"
 Rough-in: 12" rough in
 Trap Seal: 2-1/4"
 Material: Vitreous china
 Warranty: Five Year Limited Warranty

Shipping Weight: **C424EF(G) - Bowl** 59 lbs.
ST423E - Tank 41.5 lbs.

Shipping Dimensions:

C424EF(G) - Bowl
 28"L x 10"W¹ x 16-1/4"W² x 17-1/4"H
ST423E - Tank
 18-7/8"L x 8-5/8"W x 18-1/8"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others


WaterSense compliant.

Meets and exceeds ASME A112.19.2 standards for drainline carry distance with a 2% grade and 4" I.D. pipe.



Meets the American Disabilities Act Guidelines and ANSI A117.1

These dimensions and specifications are subject to change without notice.

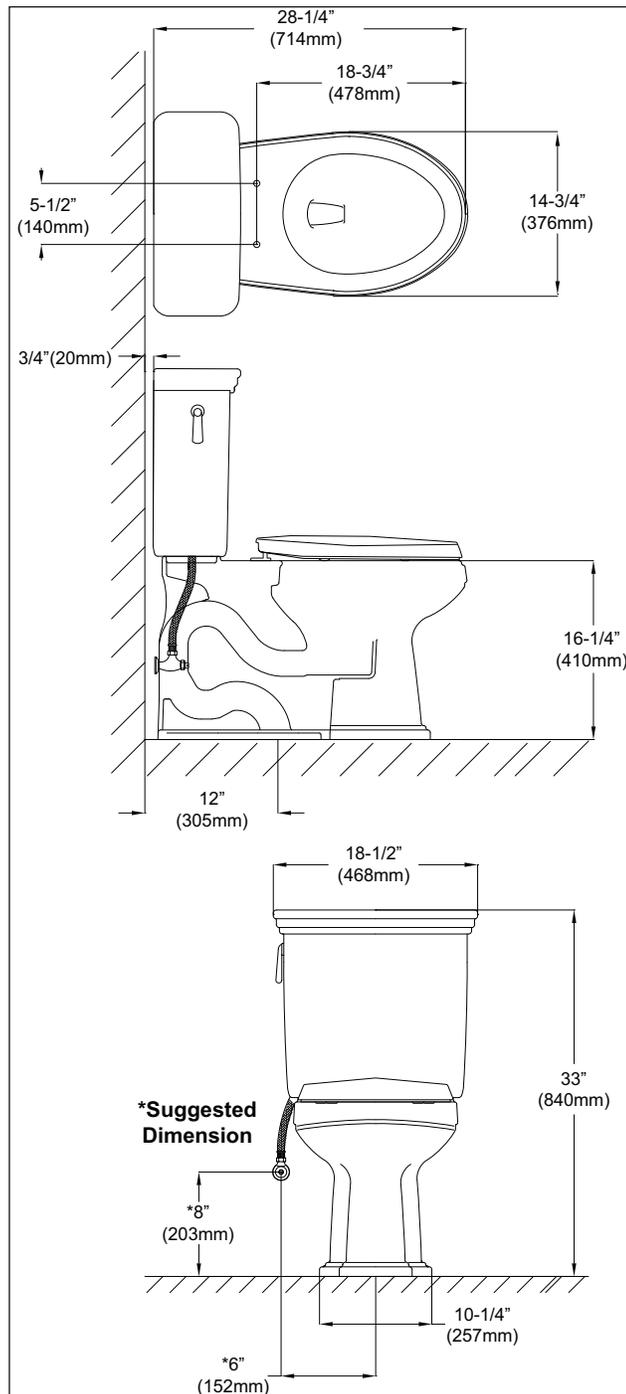

CST424EF(G) - Eco Promenade Toilet

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 03/08 #A10460

Printed on recycled paper

REV 05/08